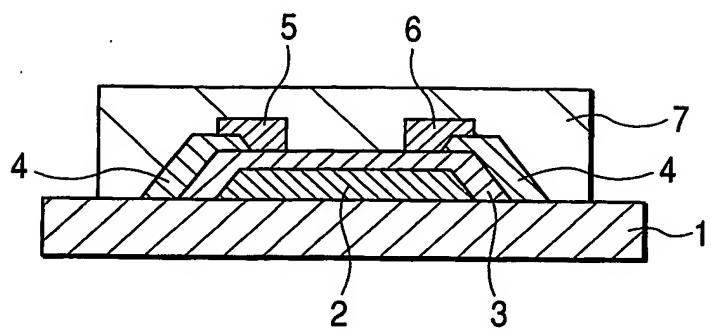
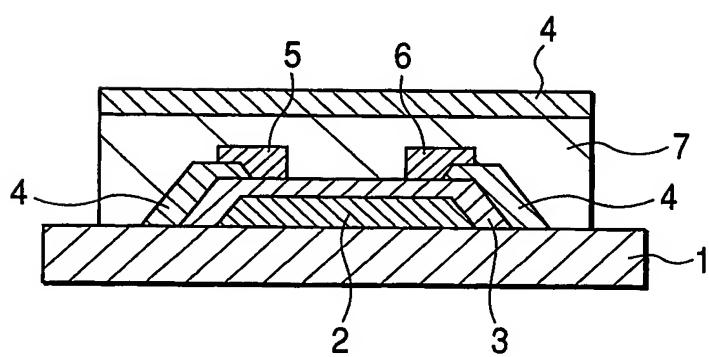
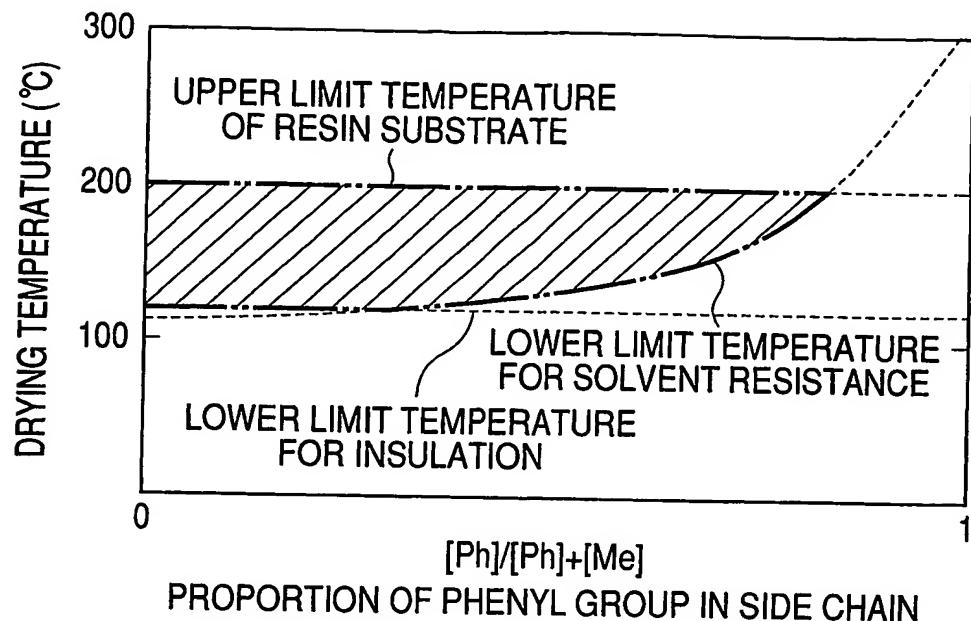
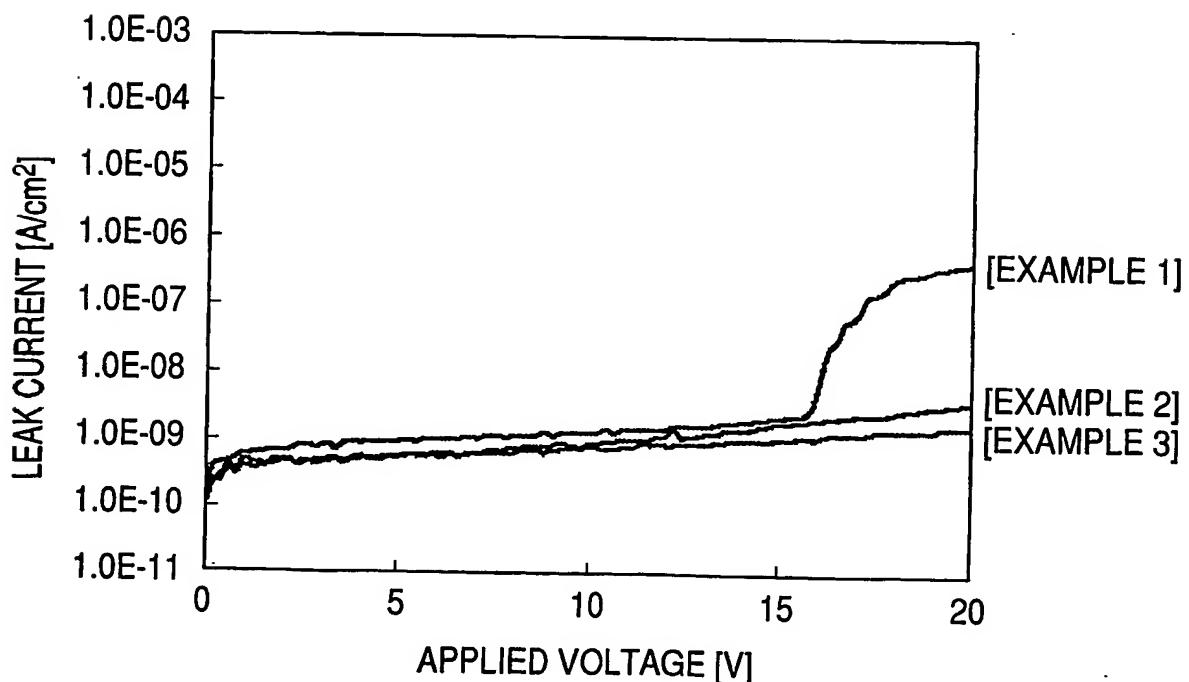


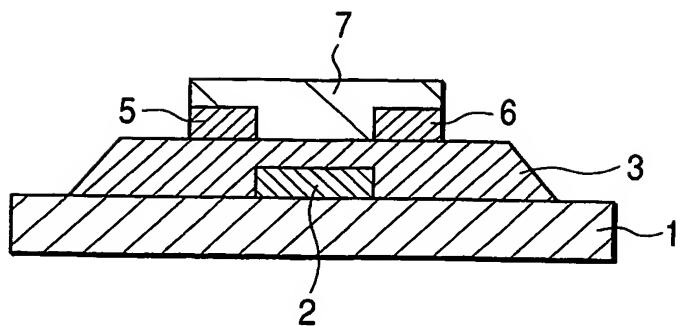
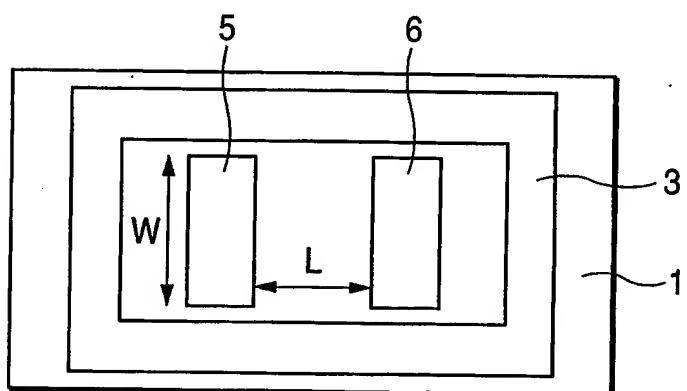
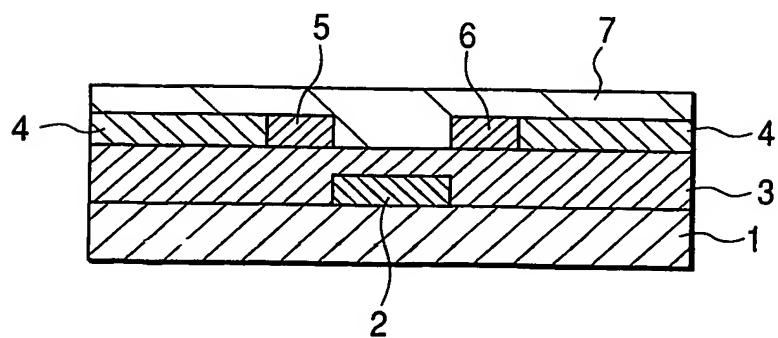
1 / 9

*FIG. 1**FIG. 2*

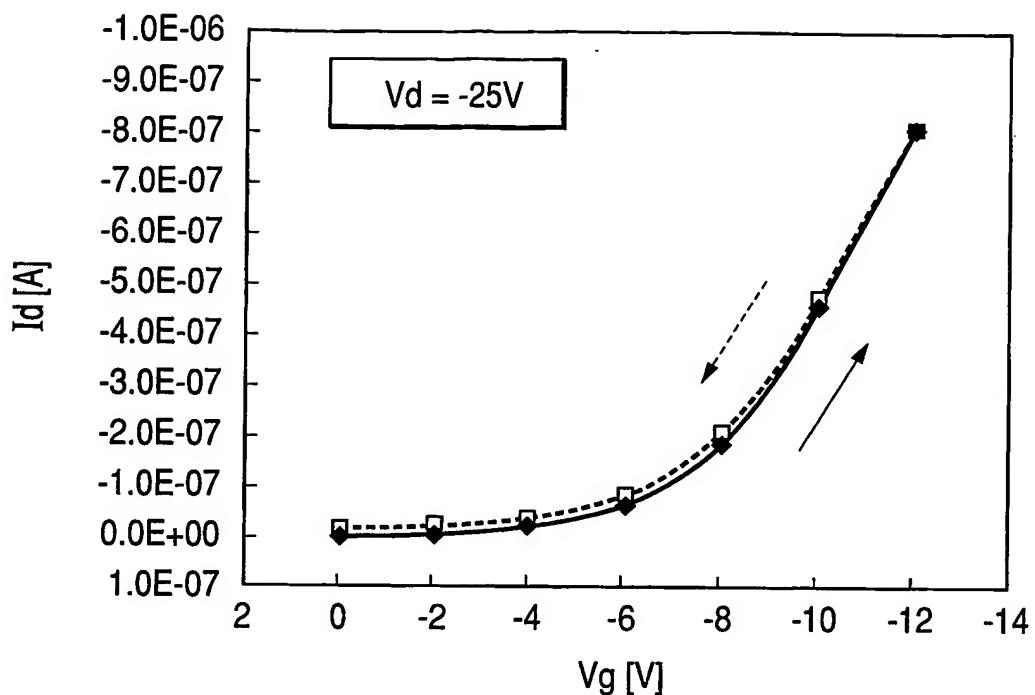
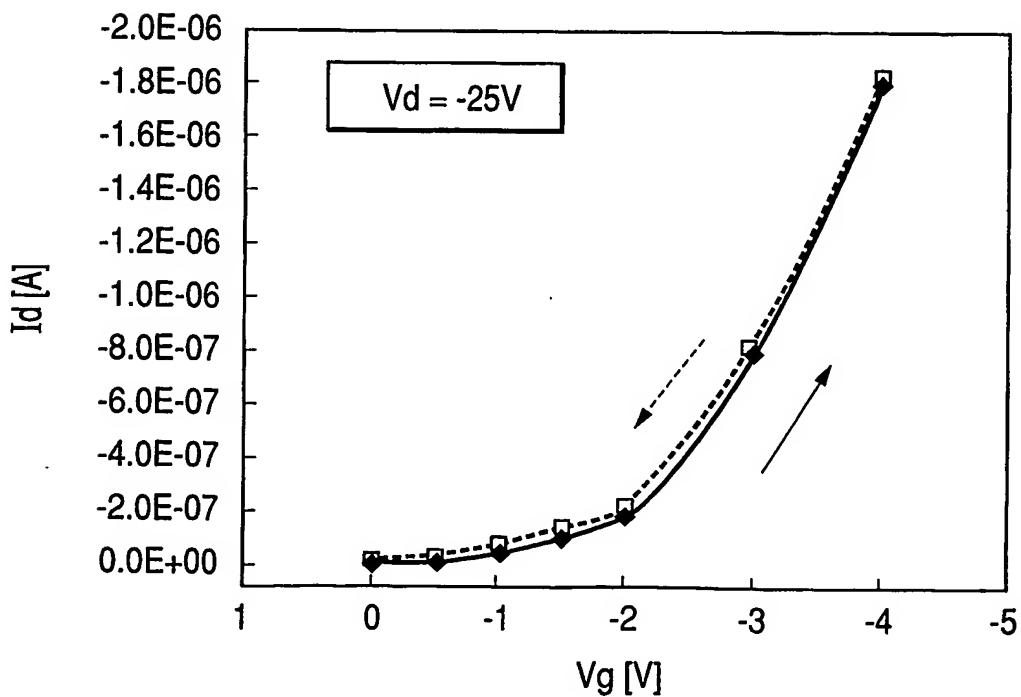
2 / 9

**FIG. 3****FIG. 4**

3 / 9


**FIG. 5A****FIG. 5B****FIG. 6**

4 / 9



**FIG. 7****FIG. 8**

5 / 9

FIG. 9

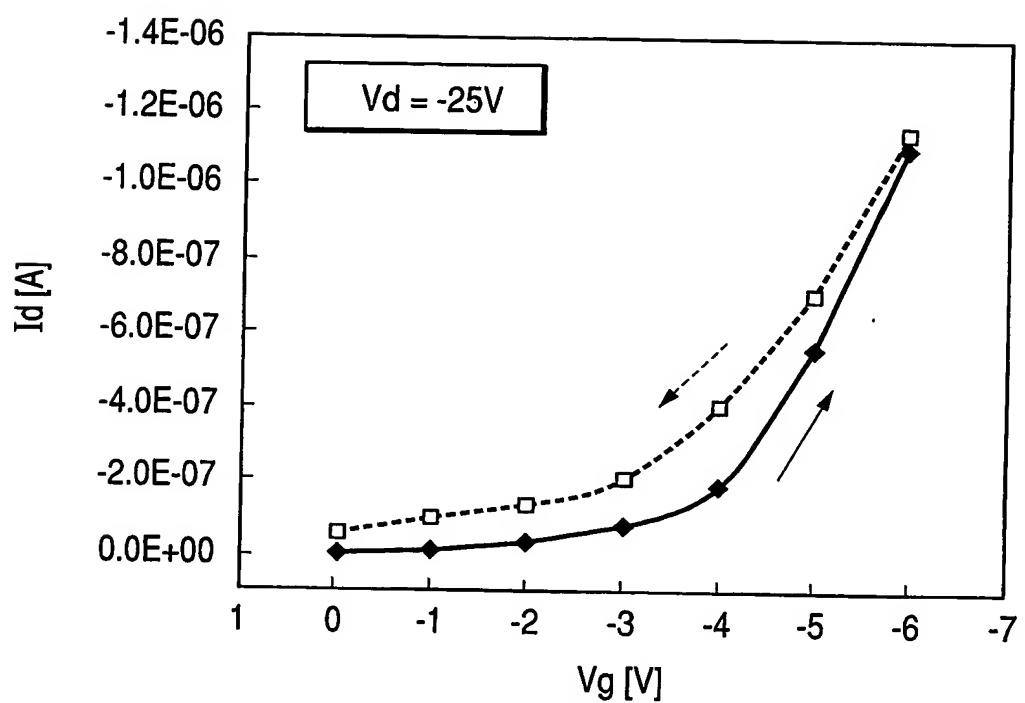

6 / 9

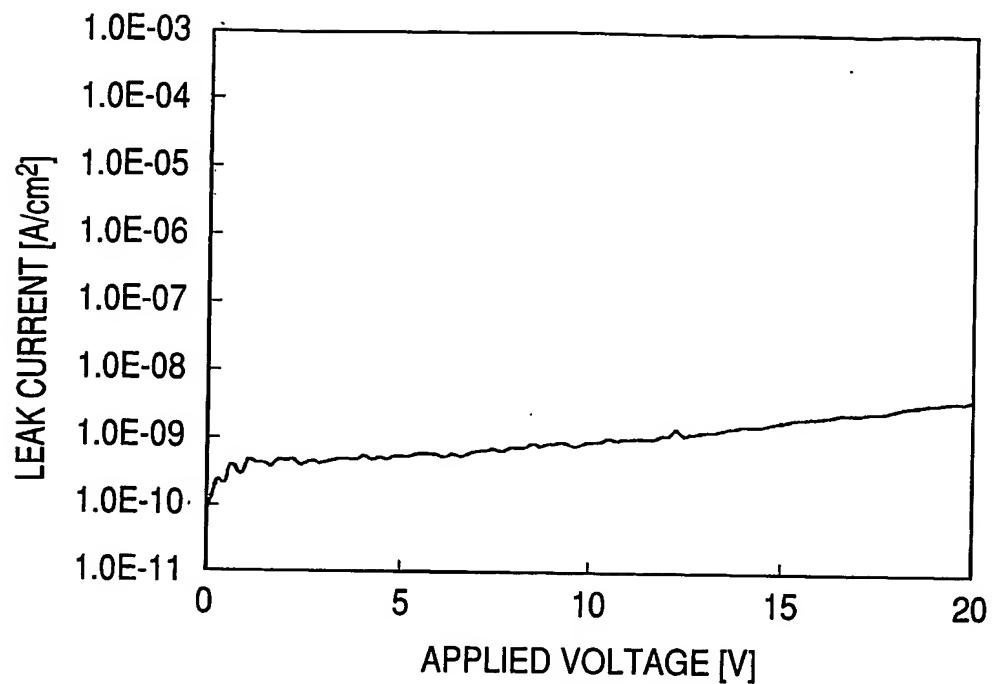
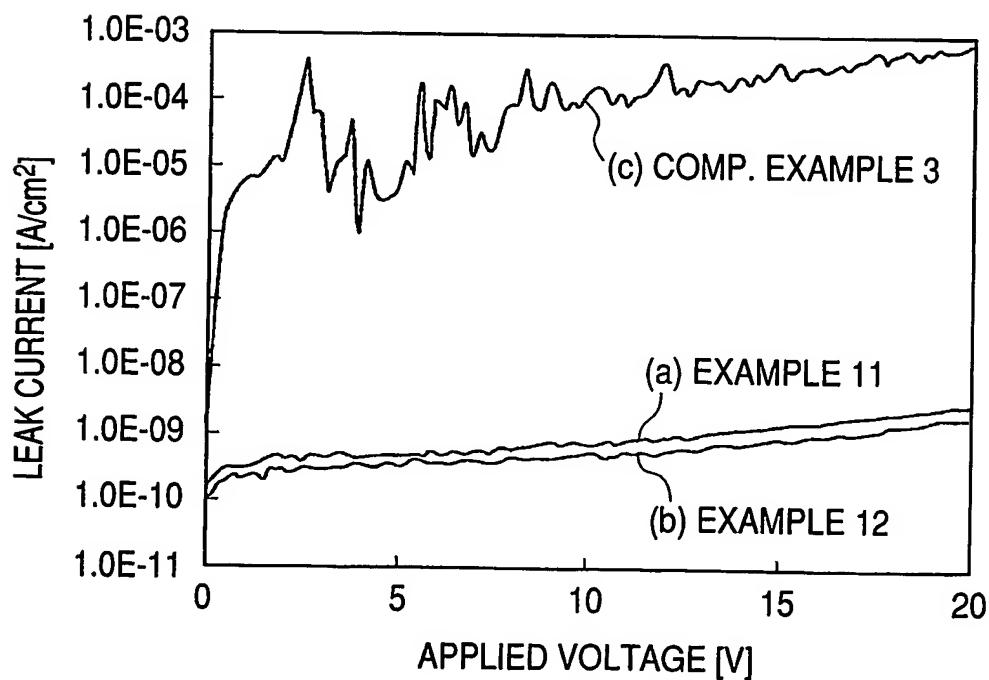
**FIG. 10****FIG. 11**

7/9

FIG. 12

	[Ph]/ [Ph]+[Me]	FORMIC ACID	INORGANIC FINE PARTICLES	DRYING TEMPERATURE	FILM THICKNESS	REFRACTIVE INDEX (632nm)	DC20V INSULATION	SOLVENT INSOLUBILITY
EXAMPLE 10	0	X	X	190 °C	180nm	1.388	O	O
COMP. EXAMPLE 3	0	O	X	100 °C	180nm	1.411	X	X
EXAMPLE 11	0	O	X	150 °C	171nm	1.392	O	O
EXAMPLE 12	0	O	X	200 °C	163nm	1.382	O	O
COMP. EXAMPLE 4	0.5	O	X	100 °C	175nm	1.492	X	X
EXAMPLE 13	0.5	O	X	150 °C	160nm	1.475	O	O
EXAMPLE 14	0	O	O	190 °C	210nm	1.513	O	O
COMP. EXAMPLE 5	OTHER RESINS	X	O	140 °C	250nm	N.D.	X	X

8 / 9

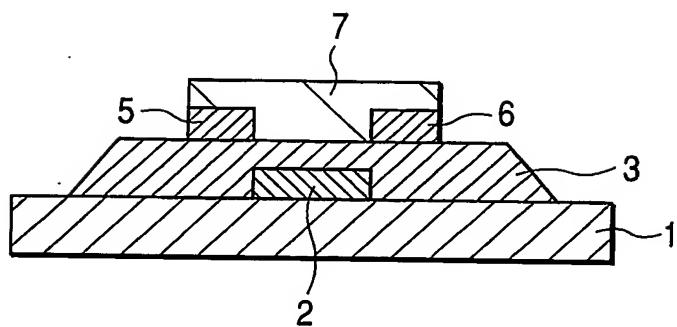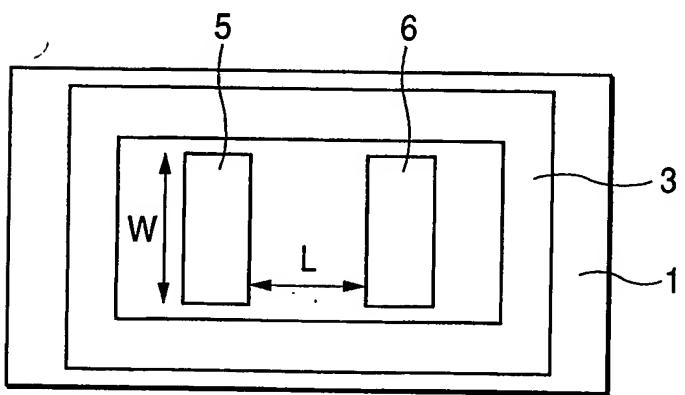*FIG. 13A**FIG. 13B*

9 / 9

FIG. 14

